

Basix® Carts and Drawers

Reliable performance for any application.

Basix® is constructed from a strong steel alloy to endure the rigors of a daily routine while providing a safe, ergonomic and flexible work area for the user.

- **Safe** — The polymer base protects the cart and surrounding environment from incidental contact. The base is designed to allow the 5" (127mm) casters to be mounted outboard of the cabinet, which keeps the cart stable when a fully loaded drawer is accessed.
- **Ergonomic** — Polymer top provides a user-friendly work surface. Optional accessory push handles can be mounted in an ergonomic fashion to allow for easy pushing or pulling of the cart.
- **Flexible** — User defined configurations can be accommodated by filling an empty cart shell with desired 3", 6", 9" and 12" (76, 152, 229, 305 mm) drawer heights.
- **Accessible** — Soft close, full-extension drawers and a full array of accessories put equipment and supplies where needed for convenient access. Optional drawer dividers keep supplies neat and organized.
- **Mobile** — This cabinet comes with 5" (127mm) diameter casters (2 with swivel brakes, 2 with swivel-lock) allowing it to be rolled easily from location to location or moved for convenience when cleaning.
- **Accessories** — A full array of task support accessories are available for above the work surface or the side of the cart.



MBX3210SB-R




MBX1310ANES4

All Metro Catalog Sheets are available on our website: metro.com

Basix® Carts and Drawers Compact Part Numbering

MBX	Drawers	Body	Lock Options	Color
Metro Basix	Position 1: # of 3" Drawers Position 2: # of 6" Drawers Position 3: # of 9" Drawers Position 4: # of 12" Drawers	S = Solid Color T = Two-Tone	N = Non-Locking L = Key Lock B = Breakaway Bar P = Push Button Lock E = Electronic Lock R = Low-Frequency Prox Reader RH = High-Frequency Prox Reader	See Below

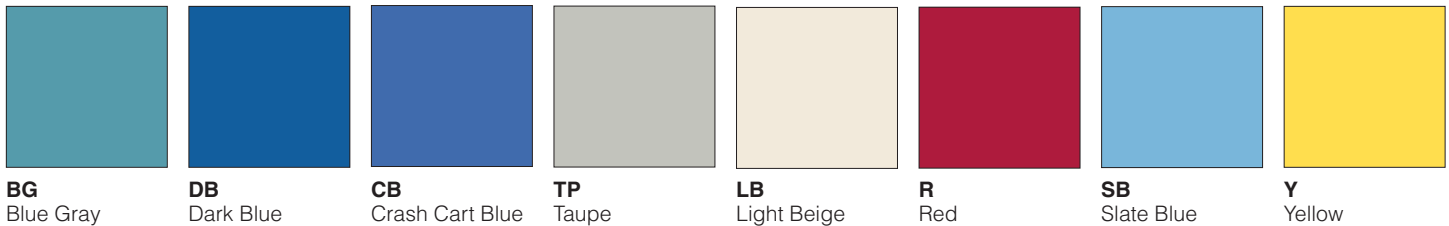

Description	Weight Capacity*		Dimensions		Approx. Pkd. Wt.		Cat. No.
	(lbs.)	(kg)	(in.)	(mm)	(lbs.)	(kg)	
3" (76 mm) Deep Steel Drawer	50	24	2.88x17x22.25	73x432x565	7	3.18	MBX103
6" (152 mm) Deep Steel Drawer	50	24	6.25x17x22.25	159x432x565	6	2.73	MBX106
9" (229 mm) Deep Steel Drawer	50	24	9.38x17x22.25	238x432x565	6	2.73	MBX109
12" (318 mm) Deep Steel Drawer	50	24	12.5x17x22.25	318x432x565	6	2.73	MBX112

*Drawer capacity is determined by cart stability with 1 drawer fully extended.

Example Part Numbering

MBX Metro Basix® **Drawers** 3110 **Body** T **Lock Options** L **Color** -Y = **MBX3110TL-Y**
 Position 1: (x3) 3" Drawers Two-Tone Key Lock Yellow
 Position 2: (x1) 6" Drawers
 Position 3: (x1) 9" Drawers
 Position 4: (x0) 12" Drawers



{36.20}



Basix® Carts and Drawers

Specifications:

Cart Body:	Double wall construction Inner wall: 22 gauge (.030"/.8mm) steel Outer wall: 20 gauge (.036"/.9mm) steel Finish: Powder coated
24" (610mm) Body	Height: 38.5" (978mm) Width: 24.13" (613mm) Length: 30" (762mm) Weight: 151 lbs. (72kg) Drawer Space: 24" (610mm)
30" (762mm) Body	Height: 44" (1140mm) Width: 24.13" (613mm) Length: 30" (762mm) Weight: 180 lbs. (82kg) Drawer Space: 30" (762mm)
Base:	Blow-molded, high-density polyethylene Steel reinforced caster channels Caster mounts located outside of cart body footprint to provide counterbalance to full extension drawers
Work Surface:	.125" (3mm) ABS , raised on four sides Dimensions: 1 ¹ / ₄ " H x 18 ¹ / ₂ " W x 26 ³ / ₄ " L (32H x 470W x 679mm L) Usable work space: 17" x 25" (432mm x 635mm)
Casters:	5" (127mm) diameter with polyurethane tread 2 swivel-brake, 2 swivel-lock (coverts from swivel to rigid) 200 lbs. (90kg) per caster, 600lbs. (270kg) per cart
Drawers:	50 lbs. (23kg) load rating per drawer
	Body: 22 Gauge (.030"/.8mm) steel w/16 gauge (.060"/2mm) lock clips Finish: Powder coated
	Fronts: .032" (.8mm) coated aluminum Finish: Powder coated
	Pull: Polymer
	Slides: Soft Close Zinc-Plated Steel Load Rating: 100 Lbs.(45kg)/set
Lock:	Bright Nickel Type 3 G Cam, 7/8" (22mm) Cylinder 2 Keys, Coded on lock and keys